



HD over Coax™



16 CH  
480 fps  
16 Channels  
480 Total fps



PathFinder™



5MP  
Up to 5MP  
Recording



4K  
Ultra HD  
Output



5 YEAR  
Limited Warranty

## Summary

VMAX® A1 Plus™ DVRs support HD-Analog and HD-TVI signals up to 5MP and CVBS up to 960H. The DVRs offer a seamless upgrade to HD resolution for new ROI from existing coaxial infrastructure. The VMAX® A1 Plus™ can record 1080p video at real-time 30fps. Up the Coax (UTC) remote configuration is available with all compatible cameras. The 16-channel DVR is available with up to 20TB of storage.

## Features


- Universal HD over Coax® DVR records HD-Analog and HD-TVI and all analog up to 960H signals
- Advanced H.264 Linux® embedded DVR
- 16-channels, real-time 30fps recording up to 5MP
- Up to 5MP recording resolution at 160fps
- PathFinder™ Peer-to-Peer (P2P) remote connection
- C3™ CMS and event server software up to 288Channels
- Event camera group recording
- Complete system analysis with real-time system and network status monitoring
- Mobile Application for iPhone®, iPad®, iPod®, Android® Smart Phones and Tablets and Apple TV®
- Mac® compatible remote ACS software
- OSD and PTZ control via coax (UTC)
- Signal hybrid detects any camera at HD-Analog, HD-TVI and 960H automatically.
- Instant channel swap, no need to disconnect or reboot the DVR.
- Snapshot Notify™: programmable interval snapshot notifications
- 4K (3840 x 2160) True HD, VGA and Spot video outputs
- 2TB - 10TB storage options
- HDD calculation and auto-recording configuration
- Thumbnail search with hour and 5-minute previews
- 10-second jump buttons for playback and fast forward
- Event notifications via e-mail and C3™ CMS and push notifications to mobile devices
- Multiplex - live, playback, recording, backup, network, configuration
- 4 audio input, 1 audio output
- 4 sensor input, 1 relay output
- Digital spot monitoring output at D1 resolution
- Simple and free DDNS service
- Push notifications via DW® VMAX® Plus™ app
- Easy web-based client with multi-user access
- Help menu on major functions
- Auto and manual firmware upgrades

## Available Models

- DW-VA1P162T - 2TB, 16CH
- DW-VA1P163T - 3TB, 16CH
- DW-VA1P164T - 4TB, 16CH
- DW-VA1P166T - 6TB, 16CH
- DW-VA1P168T - 8TB, 16CH
- DW-VA1P1610T - 10TB, 16CH
- DW-VA1P1612T - 12TB, 16CH
- DW-VA1P1616T - 16TB, 16CH
- DW-VA1P1620T - 20TB, 16CH

## Dimensions

Unit: Inch (mm)

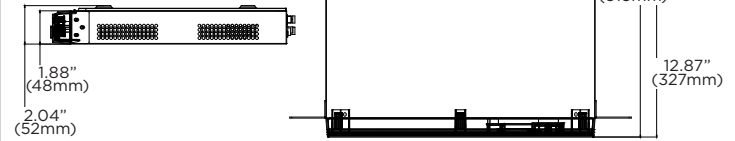

## Specifications

VIDEO			
Operating system	Embedded Linux®		
System	channel	16CH	
	Signals supported	Analog signal up to 960H, HD-Analog and HD-TVI up to 5MP	
Video-out	Monitor	True HD, VGA and Spot outputs	
	Framerate	480fps	
Resolution	HDMI: 2560x1440, 3840x2160 (4K), 800x600, 1024x768, 1280x1024, 1920x1080		
	VGA: 800x600, 1024x768, 1280x1024, 1920x1080		
Spot: D1			
Screen mode	1, 4, 6, 9, 10, 13 & 16		
Audio	Input	4 inputs	
	Output	1 output	
Codec	ADPCM		
Alarm	Alarm input	4 inputs	
	Alarm output	1 output	
Serial	1x RS485 for keyboard and PTZ control		
User interface	Graphical user interface (GUI), IR remote control, USB mouse		
PERFORMANCE			
Recording	Compression	H.264	
	Recording mode	Continuous, schedules, sensor-activated, motion detection, pre and post alarm, emergency, quick backup	
	Pre recording	0- 5sec	
	Post recording	0-5min	
	Recording rate	960x480/576 (960H): 480fps	
		1280x720 (HD): 480fps	
Recording resolutions	1920x1080 (HD): 480fps		
	2560x1600 (4MP): 240fps		
2560x1944 (5MP): 160fps			
Playback	Recording resolutions	354 x 240, 720 x 480, 960 x 480, 1280x720, 1920x1080, 2560x1600, 2560x1440, 2560x 1944	
	Playback rate	960x480/576 (960H): 480fps	
		1280x720 (HD): 480fps	
	Playback resolution	1920x1080 (HD): 480fps	
		2560x1600 (4MP): 240fps	
	2560x1944 (5MP): 160fps		
Playback resolution	1, 4, 9 & 16 Ch at 1080P (up to 4K 3840x2160)		
Fast forward functions	x1, x2, x4, x8, x16, x32		
Playback functions	Intelli-search by time bar, calendar (date and time), event search and thumbnail search		
Storage	HDD interface	1x SATA HDD	
	Max. internal storage	20TB	
	HDD interface type	SATA	
HDD health check	Temperature, S.M.A.R.T. with e-mail notifications		
Features	Camera color control	Via UTC	
	Digital zoom	Live and playback	
	Software upgrade	USB flash drive, network upgrade, FTP remote upgrade	
	Mobile client	Mobile app for Apple® & Android® smart phones & tablets	
	Covert channel	Yes	
Settings import/export	Import and export DVR settings		
NETWORK			
Streaming	LAN	Ethernet (1 x gigabit)	
	Transmission speed	960x480/576 (960H): 480fps	
		1280x720 (HD): 480fps	
	1920x1080 (HD): 480fps		
	2560x1600 (4MP): 240fps		
2560x1944 (5MP): 160fps			
Protocol	Fixed IP, DHCP, UPnP, DDNS		
Access	Web viewer	Live, playback and configuration up to 10 multiple connections	
	Client monitoring software	Mac® (Apple® S/W), C3™ (CMS S/W)	
Network features		Dual stream, separate local recording and network transmission	
		Network bandwidth control (25 Kbps - 1000 Mbps)	
		Time synchronization by NTP server ("pool.ntp.org")	
	Remote & E-mail notification, remote system reboot by IE, remote PTZ control		
	PathFinder™ P2P service (auto port forwarding)		
Backup device	Local backup by USB and CMS over the network and FTP		
System recovery after power failure	Auto-reboot and journaling file system		
GENERAL			
Operating temperature and humidity	41°F - 104°F (5°C - 40°C), less than 80% (non-condensing)		
Certification	CE & FCC & KCC & WEEE, RoHS		
Power requirements	DC12V		
Power consumption	60W, 5A		
Dimension (W x D x H)	15.15" x 12.4" x 1.88" (385 x 315 x 48 mm) (1U)		
Weight	4.4 lbs (2kg)		
Warranty	5 year limited		

