


Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com



ø16 2.0/35mm C	
FOCAL LENGTH	f=35mm
MAX. DIAMETER (RATIO)	F=1:2.0~16
ELEMENT	6 GROUPS 8 ELEMENTS
PICTURE SIZE	12.8x9.6mm
ANGLE	VER. ANGLE 15.6°
	HOR. ANGLE 20.8°
	DIA. ANGLE 25.8°
DISTORTION (TV)	0.02%
SHOOTING RANGE AT	VER. 52.5mm
MINIMUM FOCUS	HOR. 70mm
DISTANCE	DIA. 87.5mm
MINIMUM FOCUS DISTANCE	0.2m
FLANGE BACK	17.526mm in air
BACK FOCUS	15.2mm in air
FILTER SCREW SIZE	M34x0.5
FRONT/REAR EFFECTIVE DIA.	FRONT ø26mm REAR ø16.9mm
MOUNT	C-MOUNT
EXIT PUPIL	-26.6mm
TEMPERATURE RANGE	-10~+50° C
STORAGE TEMPERATURE RANGE	-20~+60° C
RESOLUTION CENTER/CORNER	CENTER 160L/mm CORNER 120L/mm
LENS COATING	WIDE BAND MULTI COATING
WEIGHT	g

NOTE: Specifications and availability are subject to change without notice  
 注) 本仕様については、予告なしに変更する場合があります。

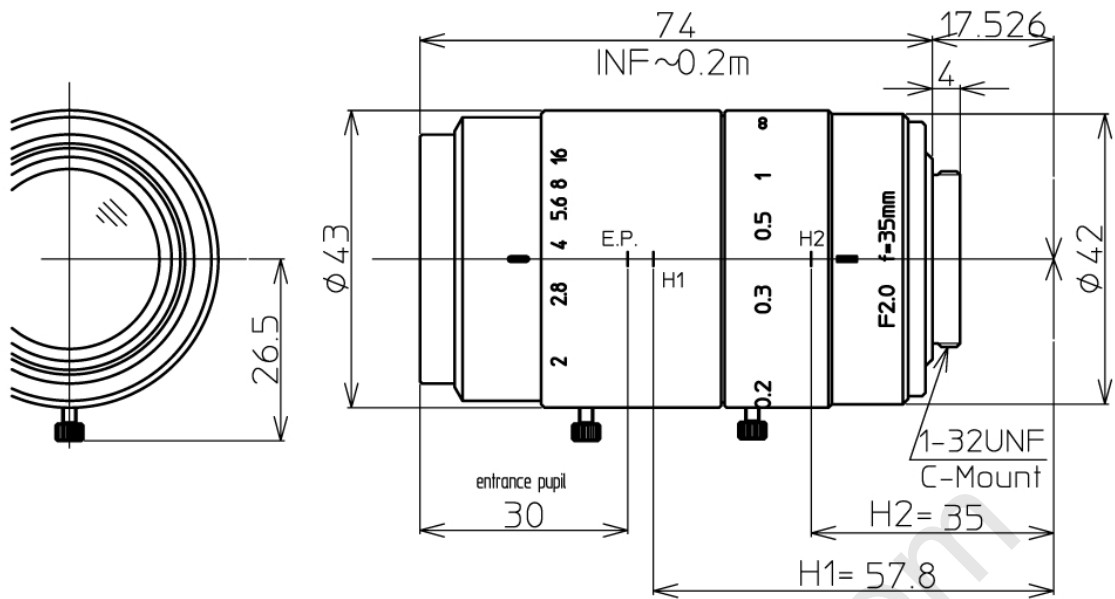

		尺 度	1/1	承 認	八木	製 図	大口
		LM35SC					
		1" F2.0 f=35mm					
2013.05.10	作成年月日						

For design help, accessories or pricing, please contact sales@avsupply or call: 1-858-565-1101

**AUDIOVIDEO SUPPLY**  
 1-800-284-2288 sales@avsupply.com  
 www.avsupply.com