AUDIO VIDEO SUPPLY

ViewZ
www.viewzusa.com

VZ-101RTC

PREMIUM LED CCTV MONITOR

VZ-101RTC ADVANTAGES

- 10.1" LED CCTV Monitor
- 16:9 / 4:3 mode Available
- BNC, HDMI, VGA, TRIGGER
- 2D Comb-filter, Noise Reduction, Built-in Speakers
- 3-Year Warranty

DIMENSIONS

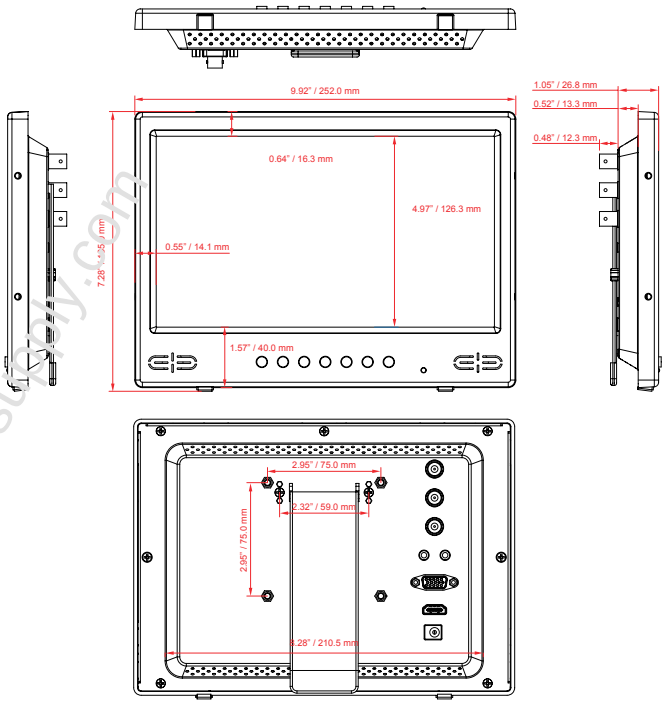

www.avsupply.com

300 cd/m² HIGH BRIGHTNESS | 800:1 CONTRAST RATIO | 1024x600 60Hz RESOLUTION | 25ms RESPONSE TIME | BUILT IN SPEAKERS | LED BACKLIGHT

16:9 SUPPORT | 4:3 SUPPORT | BNC LOOP THROUGH | CE CERTIFIED | FC CERTIFIED | VESA MOUNTING COMPLIANT

MODEL #		VZ-101RTC
VIDEO		
Screen Size		10.1"
Max. Resolution		1024 x 600 @60Hz
Pixel Pitch		0.2175 mm x 0.2088 mm
Brightness		300cd/m²(Typical)
Contrast Ratio		800:1
Aspect Ratio		16 : 9
Viewing Angle (H/V)		170°/170°
Display Color		16.7 Million
Response Time		< 25 ms
Video System		NTSC / PAL
INTERFACE		
AV (Composite) In/ BNC Out		2 / 1
HDMI In		1
RGB In(15Pin D-Sub)		1
Trigger In		1
Audio In		1
AUDIO		
Built in speaker		1W X 2
SPECIAL FEATURES		
Filter Type		2D Comb-filter / Noise Reduction
Multi-lingual Language		English, Spanish, French, German, Italian, Portuguese, Polish, Russian
DIMENSIONS & WEIGHT		
Outline Dimension (W x H x D)		9.92" x 7.28" x 1.05" 252.0 mm x 185.0 mm x 26.80 mm
Net Weight / Gross Weight		2.86 lbs (1.3 Kg) / 3.52 lbs (1.6Kg)
MOUNT		
VESA		75mm x 75mm, M4 x L8 Screws
GENERAL		
Power	Electrical Ratings	DC 12V, 2.0 A (AC100 ~ 240V[50/60Hz])
	Consumption (Typ/Max)	8 W
Warranty	Parts/ Labor	3 Year / 3 Year
Operating Temperature		14 - 122°F / -10 - 50°C
Operating Humidity		20 ~ 70% RH
Regulations		CE, FCC(A)
Compatible Mounts	Wall	VZ-WM05, VZ-WM11, VZ-AM01
	Rack	VZ-RMK08

INTERFACE



1. BNC (Composite) OUT
2. BNC (Composite) IN #1
3. BNC (Composite) IN #2
4. Audio IN
5. Trigger IN
6. VGA IN
7. HDMI IN
8. DC 12V IN

Specification subject to change without notice.