


Weather Resistant Bullet Cameras with PIR Sensor & White LEDs

- CVC5100BPVF** 2.8 - 12mm auto iris varifocal lens, dark grey housing
CVC5100BPVFW 2.8 - 12mm auto iris varifocal lens, white housing

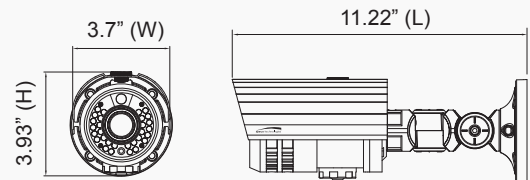

Features

- 1/3" Sony Super HAD II™ CCD
- 600 TV lines of resolution
- True Day/Night capability
- Digital Deterrent®: white LEDs are turned on when motion is triggered
- 24 IR LEDs & 6 white LEDs
- Digital image stabilization
- 12VDC / 24VAC dual voltage operation
- 5 year warranty

Specifications

Image Sensor	1/3" Sony Super HAD II™ CCD
Resolution	600 TV lines
Minimum Illumination	CDS off: 0.15 lux CDS on: 0.00002 lux
Effective Pixels	811 (H) x 508 (V) 768 (H) x 494 (V)
Number of LEDs	IR: 24, white: 6
IR Range	Up To 65 ft. (depending on scene reflection)
IR LED Wavelength	850nm
White Balance	ATW / Outdoor / Indoor / Manual AWC (1,700°K - 11,000°K)
AGC	High / Low / Off
Backlight Compensation	BLC / HLC / Off
S/N Ratio	More than 52dB
Video Output	CVBS: 1.0Vp-p / 75 ohms
Electronic Shutter Speed	1/60 sec. - 1/120,000 sec.
Sharpness	On / Off (level adjustable)
Privacy Masking	On / Off (12 programmable zones)
Scanning Frequency	15.734kHz (H) & 59.94Hz (V)
Scanning System	2:1 interlace
Synchronization	Internal
TV System	NTSC
Day/Night	Color / BW / Auto

Sense-Up	Auto / Off (selectable x2 - x512)
Motion Detection	On / Off (8 programmable zones)
Digital Zoom	On / Off (1x - 16x)
DIS	On / Off
Flip/Mirror	On / Off
SSDR	On / Off (level adjustable)
3DNR	On / Off (level adjustable)
Power Supply	12VDC / 24VAC dual voltage operation (power supply not included)
Power Consumption	12VDC, 250mA (CDS off, PIR off) 600mA (CDS on, PIR on) Heater on adj: 200 - 600mA 24VAC 100mA (CDS off, PIR off), 250mA (CDS on, PIR on) Heater on adj: 120 - 250mA
Operating Temperature/ Humidity	- 4° F – 140° F / RH 95% max.
Storage Temperature/ Humidity	- 4° F – 140° F / RH 95% max.
Dimensions	3.7" (W) x 3.93" (H) x 11.22" (L)
Weight	3.5 lbs.

Optional Accessories



CVCJBB
Bullet Camera
Junction Box



INTJBS
Square
Junction Box



INTCM
Corner/Pole
Adaptor



PSW4
24VAC
Power Supply



PSW5
12VDC
Power Supply



Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation.
Spec Rev. 2/25/13