

Day / Night Armordome Camera with Infra-red LED Illuminators

WDD-4905DN



SPECIFICATION

- True day & night operation - color camera with infra-red self illumination
- 14 infra-red illuminators provide scene illumination up to 30' distance
- Vari-focal 4-9mm auto IRIS lens (other vari-focal auto iris lenses available)
- Auto IRIS level control provides adjustments for extreme light conditions
- High impact lexan dome cover & tamper proof screws provide ultimate protection of the camera circuitry
- Manual pan, tilt and rotating (X-Y-Z axis) adjustments allow for unobstructed movement of camera module
- Line lock with vertical phase adjustments makes this camera easy to integrate into matrix systems
- Back light compensation - selectable on/off
- Digital signal processing (DSP) on color armordome camera give unmatched picture clarity

Input voltage

AC24V

Power consumption

200mA or less

Video connector

BNC

Power connector

Bare leads

Pixels

High resolution - 768(H) x 494(V),
Normal resolution - 512(H) x 492(V)

S/N ratio

More than 48dB

Video output

1.0Vp-p 75Ohm

CCD

1/3" Color DSP and 1/3" monochrome

Auto IRIS

Level control adjustment

Back Light (BLC)

Selectable on / off

Construction

Heavy duty metal base and swivel bracket
-polycarbonate dome cover

Color

Black (beige available)

Cable entry

1/2" hole on bottom plate

Manual pan / tilt adjustment

120° pan / 180° tilt (when installed)

Manual rotation adjustment

75° rotation (when installed)

Lens

4.0mm ~ 9.0mm vari-focal auto IRIS lens
(optional 2.6 ~ 6.0mm vari-focal auto-IRIS lens)

Dimensions

4.7" (119mm)DIA. x 3.55" (90mm)H

Operating temp.

+4°F ~ +158°F

Storage temp.

-4°F ~ +160°F

NEMA rating

Type 2

Qty of LEDs

14

LED frequency

870 nanometer

weldex.com
oem@weldex.com
Tel: (714) 761-2100 [USA]
Fax: (714) 761-3811 [USA]
Tel: +49 (0)2102 528 2803 [GER]
Fax: +49 (0)2102 528 2804 [GER]

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101



1-800-284-2288 sales@avsupply.com
www.avsupply.com

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com



© 2014 Weldex

6751 Katella Avenue, Cypress, CA 90630 [USA]
Broichhof Strasse 5 D-40880 Ratingen, Germany [GER]

Day / Night Armordome Camera with Infra-red LED Illuminators

WDD-4905DN

／ DIMENSIONS

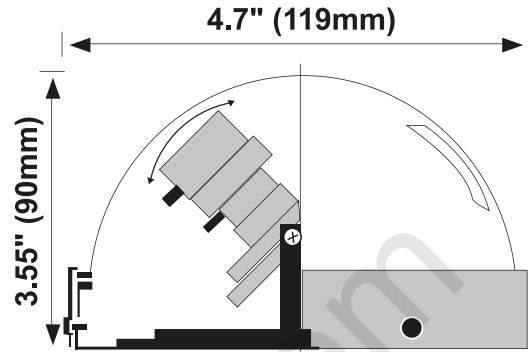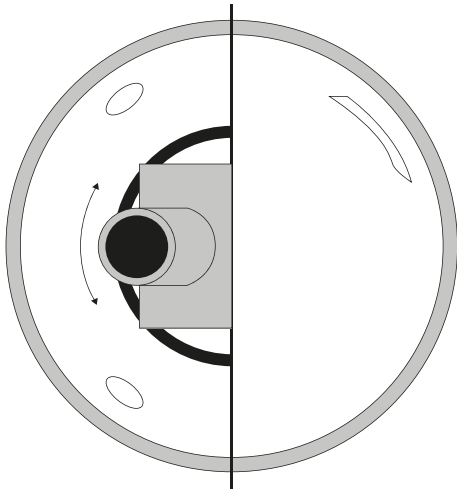

Surface mount dome camera on ceilings, walls, poles or other solid areas

Color Camera	Image Sensor	Power Req.	Resolution	Lux	Lens
WDD-4900DN	1/3" Color DSP	AC24V	420 TV Lines	0.3	4mm ~ 9mm Vari-focal Auto Iris
WDD-4905DN	1/3" Color DSP	AC24V	570 TV Lines	0.3	4mm ~ 9mm Vari-focal Auto Iris

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

weldex.com
oem@weldex.com
Tel: (714) 761-2100 [USA]
Fax: (714) 761-3811 [USA]
Tel: +49 (0)2102 528 2803 [GER]
Fax: +49 (0)2102 528 2804 [GER]

© 2014 Weldex
6751 Katella Avenue, Cypress, CA 90630 [USA]
Broichhof Strasse 5 D-40880 Ratingen, Germany [GER]

WELDEX

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101